# **Installation & Wiring Instructions**

D2N/1/TP40/R Two Part Remote DALI-2 Self-Test Conversion Kit



PLEASE READ THESE INSTRUCTIONS BEFORE COMMENCING INSTALLATION & LEAVE WITH END USER

### **Description:**

The Liteplan D2N/1/TP40/R DALI-2 self-test emergency lighting modules are designed to convert a wide range of LED types with one main version. The D2N/1/TP40/R is the popular choice for converting most standard LED luminaires and arrays between 6 and 55 Volts.

The modules are designed to be installed by breaking into the low voltage connection between the mains driver and the LEDs and allows the LEDs to be operated as normal under mains healthy conditions and operated at reduced light output in an emergency.


The module automatically adjusts the output LED current to provide the best match between the battery and the load, providing maximum illumination whilst ensuring full battery duration and are compatible with a wide range of

The product features battery temperature protection in accordance with IEC 61347-2-7: 2012+A12:2022.

### Specification:

Input Voltage	230-240 Volts AC 50/60 Hz
Power Rating (charging)	$2.8W\ 17mA - \lambda = 0.67$
Power Rating (charged)	$1.4W\ 12mA - \lambda = 0.48$
Duration	3-hours
Ambient Temp.	0°C to 35°C
Max Module Tc	70°C
Battery Temp. Parameters	0°C to 55°C
Terminal Blocks	0.5-1.5mm² Push Fit
Battery Fuse	Internal
Battery Discharge Current	950mA nominal
Discharge Voltage DDP	2.4V
Ingress Protection	IP20
Battery Pack	3.2V 3.8Ah LiFePO4
Charge Current	225mA nominal
Recharge Period	24-Hours
Module Size (L x W x H)	231mm x 33.6mm x 22.5mm
Module Fixing Centers	224mm
Module Weight	0.23Kg (with cables)
Battery Weight	0.13Kg
Battery Dimensions	90mm x 28mm diameter
Insulation between Supply	

& Battery Double Reinfo						rced			
Cut-out (mm)	40	45	50	53	56	60	65	70	75
Void (mm)	100	151	120	125	110	00	02	7/.	60

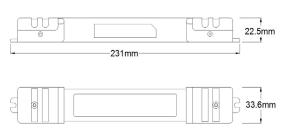

Fixing Centres 224mm

D2N/1/TP40/R

Prated - 2.2W Irated - 352mA - 40mA Voltage Range 6 - 55 Volts Open Circuit Voltage (U-OUT) = 60 Volts

#### Warning

Avoid running the LED mains driver and emergency pack without the load connected. Failure to do so may result in damage to the LED array

#### **Important**

It is recommended that the module is installed by a competent person ensuring the installation complies with the necessary standards. Liteplan accept no responsibility for injury, damage or loss, which may arise as a result of incorrect installation, operation or maintenance.

The conversion requires an unswitched supply for charging the battery and a switched supply if the unit is being used for maintained operation.

ISOLATE BOTH MAINS SUPPLIES AND DISCONNECT THE BATTERY BEFORE INSTALLATION OR MAINTENANCE.

#### Installation

When converting a luminaire observe the following points:-

- Ensure that the module and battery pack will operate within their temperature ratings at their chosen loaction.
- Ensure that the interconnecting loom is kept as short as possible.
- Ensure that the Permanent Live & Switched Live feeds are connected
- Arrange the wiring to avoid running the 240 Volt cables next to the modules output to the LED to obtain the best EMC results.
- Requirements for 'F' markings must be observed.
- Identify clearly the NEW Un-switched supply.
- Ensure the LED Charge Indicator is clearly visible in every day use.
- If fitted within a metal enclosure, connect earth terminal to metal gear tray for improved EMC
- This module is not intended for use in luminaires for high-risk task area
- Ensure that DALI cables are run away from mains voltage cables.
- This module is protected against battery polarity reversal.

| www.liteplan.com | customerservice@liteplan.com | RM3 OAP. UK

Liteplan reserve the right to change colour, price or specification without prior notice










## **Installation & Wiring Instructions** D2N/1/TP40/R Two Part Remote DALI-2 Self-Test Conversion Kit



PLEASE READ THESE INSTRUCTIONS BEFORE COMMENCING INSTALLATION & LEAVE WITH END USER

**Typical** Conversion Wiring Diagram

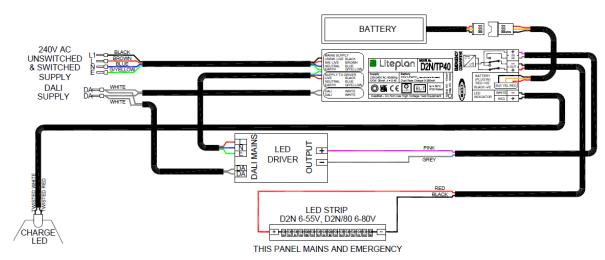

LED Fault indication						
Green Solid	Battery Charging, no fault	On				
Green Blink	Pre-Commissioning	2.0s on, <b>0.2s off</b>				
Green Flash	Function Test running	0.2x on, 2.0s off				
Green Flash	Duration test running	0.2s on, <b>2.0s off</b>				
Red Blink	Battery Temperature fault	0.2s on, 3.8s off				
Red Flash x1	Battery fault	0.5s on, 3.5s off				
Red Flash x2	Lamp fault	2x 0.5s on, 2.5s off				
No Indication	Fault	-				
Red/Green Flash	Duration test timout (after 7 days)	2.0s green, 0.2s red				

Luminaire Ref/Location			In Cas	In Case of difficulty, contact the Installation Engineers:-								
				Tel:								
Full Recl		Duration 3 Hours				Lamp Type - LED						
				ROUTINE	E TEST RECO	RD	-					
	Year 1		Yea	Year 2		Year 3		Year 4		Year 5		
Monthly Test	Signed	Date	Signed	Date	Signed	Date	Signed	Date	Signed	Date		
Functional												
Functional												
Functional												
Functional												
Functional												
Functional												
Functional												
Functional												
Functional												
Functional												
Functional												
Three Hour												

Tel +44 (0)1708 372223 | www.liteplan.com | customerservice@liteplan.com | RM3 0AP. UK Liteplan reserve the right to change colour, price or specification without prior notice

