
Battery Technical Specification 2/LP38/S/MS - 6.4V 3.8Ah Lithium Iron Phosphate Pack





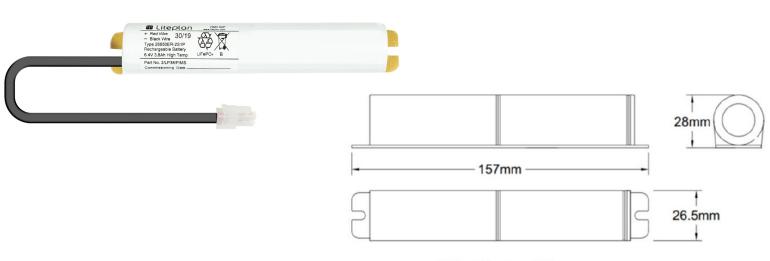

Fixing Centres 150mm

Technical Details:

Nominal Voltage (V)	6.4 Volts		Length and Width	157mm x 28mm x 26.5mm
Nominal Capacity	3.8Ah @ 25°C		Fixing Centres	150mm
Rated Wh	20.5Wh		Weight	200 g
Standard Charging Current	360mA			
Standard Discharge Current	950mA to 5V			
Charging Cut-off Voltage	7.1V			
Temperature:				UN 3481
Standard Temperature Range		0 to + 6	0°C	We advise that when shipping these
Storage (within 1 Year)		0 to + 2	5℃	batteries by air, that IATA regulation UN3481 PI966 is followed. This states
There is 1 version available -				that the battery must be packed with its associated control gear and the

Dimensions:

Order Codes

2/LP38/S/MS

6.4V 3.8Ah LiFePO4 Battery and Molex Connector

This battery features a protection circuit module (PCM) that regulates the current between cells and protects the battery from any potential short circuit situations.



Batteries supplied with leads are fitted with an irreversible socket & 20cm of cable. ENSURE CORRECT POLARITY

its associated control gear and the above label must appear on the outer

packaging.

Tel +44 (0)1708 372223 | www.liteplan.com | customerservice@liteplan.com | RM3 0AP, UK

Liteplan reserve the right to change colour, price or specification without prior notice