
## Technical Specification MCONTROLLER - Monitor Controller Enclosure





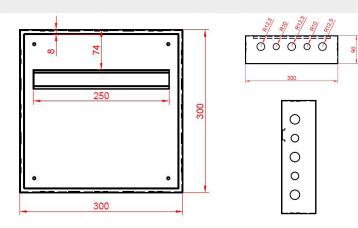

- DALI Controller to Manage up to 10 MHUBs
- Built in accordance with IEC 62386-202
- Low Power Consumption
- Features Power Isolation for Maintenance
- Can be Connected in Multiple Arrangements
- Use with Monitor Pro, SimpleCore and CircaLite

The Monitor MCONTROLLER is designed as a wall mounted, modular enclosure which can be mounted along with, or away from the MHUB enclosures it manages. The enclosure is installer friendly with many knock outs for mounting and cable entry.

The Monitor MCONTROLLER will manage up to 10 MHUBs, feeding data back to the Controlling PC. The MCONTROLLER can be connected in a network arrangement of infinate proportions.

There is one version available -

## **Order Codes**

MCONTROLLER/ENC	Modular enclosure containing 1No. Monitor Controler with 5 port un-managed
	network switch. Will manage up to 10No. MHUB/2DALI/ENC1/SW.

## **Technical Details:**

Mains Supply	230-240V AC 50/60 Hz
Power Rating	$26\text{mA}$ $\lambda = 0.88$
Temperature Parameters (Ta)	0°C-35°C
Electrical Connection	Permanent Mains Supply to Fused Terminal Block Accepting 1.0 to 2.5mm cable.
Ethernet Connector	RJ45
Overall Dimensions	300mm wide x 300mm high x 90mm deep
Cable Entry Choices	R10 and R12.5

Tel +44 (0)1708 372223 | www.liteplan.com | customerservice@liteplan.com | RM3 0AP. UK

Liteplan reserve the right to change colour, price or specification without prior notice

