

Technical Details:

Nominal Voltage (V)	3.2 Volts
Nominal Capacity	4.8Ah @ 25°C
Rated Wh	15.4Wh
Standard Charging Current	450mA
Standard Discharge Current	900mA to 2.5V
Charging Cut-off Voltage	3.65V

Dimensions:

Length and Width	72mm x 55mm
Height	21mm
Fixing Centres	19mm x 20mm
Weight	141 g

Temperature:

Standard Temperature Range	0 to + 60°C
Storage (within 1 Year)	0 to + 25°C




We advise that when shipping these batteries by air, that IATA regulation UN3481 P1966 is followed. This states that the battery must be packed with its associated control gear and the above label must appear on the outer packaging.

There is 1 version available -

Order Codes

3/LP48/P/MS	3.2V 4.8Ah With Mounting Plate and Molex Connector
-------------	--

This battery features a protection circuit module (PCM) that regulates the current between cells and protects the battery from any potential short circuit situations.

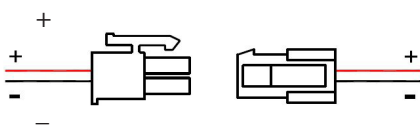

Batteries supplied with leads are fitted with an irreversible socket & 20cm of cable.
ENSURE CORRECT POLARITY