

Technical Details:

Nominal Voltage (V)	3.2 Volts
Nominal Capacity	4.8Ah @ 25°C
Rated Wh	15.4Wh
Standard Charging Current	450mA
Standard Discharge Current	900mA to 2.5V
Charging Cut-off Voltage	3.65V

Dimensions:

Length and Width	220.5mm x 32mm x 28.1mm
Fixing Centres	Hook Eye
Weight	194 g

Temperature:

Standard Temperature Range	0 to + 60°C
Storage (within 1 Year)	0 to + 25°C




We advise that when shipping these batteries by air, that IATA regulation UN3481 PI966 is followed. This states that the battery must be packed with its associated control gear and the above label must appear on the outer packaging.

There is 1 version available -

Order Codes

3/LI48/PT/MS	3.2V 4.8Ah Encased LiFePO4 Battery and Molex Connector
--------------	--

This battery features a protection circuit module (PCM) that regulates the current between cells and protects the battery from any potential short circuit situations.

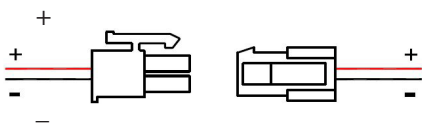

Batteries supplied with leads are fitted with an irreversible socket & 20cm of cable.
ENSURE CORRECT POLARITY