
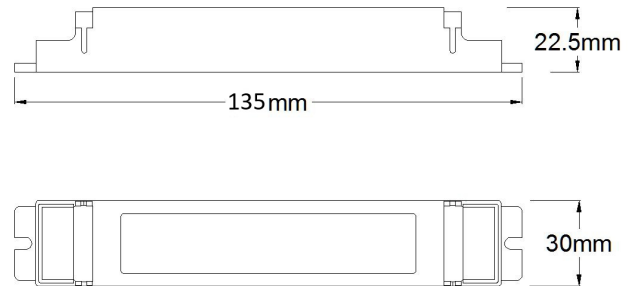


Technical Specification
CPH -
 Hold off Driver for Central Batteries



Fixing Centres 128mm

The CPH module is supplied as a dedicated emergency lighting driver for integrally mounting within the luminaire. It is suitable for powering our range of dedicated emergency LEDs and is designed to run from a central battery system.

- Central Battery Hold off Driver
- Suitable for 50V, 110V & 240V Systems
- Output Current Selected via a Jumper
- Operates from AC or DC Systems
- Available in Remote Enclosure if Required
- Designed to Operate Dedicated LED Load

The CPH unit is designed as a centrally supplied unit (240V, 110V or 50V AC/DC) to run a dedicated LED in emergency, with the output held off whenever the 240V AC unswitched supply is present.

At the point the unswitched supply is broken, the driver will accept the feed from the central battery and power a single LED at 350mA, 550mA, or 700mA.

There is 1 version available -

Order Codes

CPH-M	Hold off Driver to run 1No. 350mA, 550mA, or 700mA LED from 50V, 110V or 240V AC or DC Central Battery Systems.
--------------	---

Technical Details:

Emergency Voltage from CBU	45-240V AC/DC (50V, 110V & 230V Nominal)
Emergency Power from CBU	See Installation Instruction
Mains Un-Switched Supply	230-240V AC 50/60Hz
240V Hold off Current/Power	6mA, 1W, $\lambda = 0.65$
Dimensions L x W x H	152mm x 26.5mm x 28.5mm (f/c 145mm)
Module Weight	0.15Kg
Terminal Cable Size	0.5 - 1.5mm ² Push Fit