


Technical Specification

CE2S - Wall Mount Exit Sign with Downlight Panel

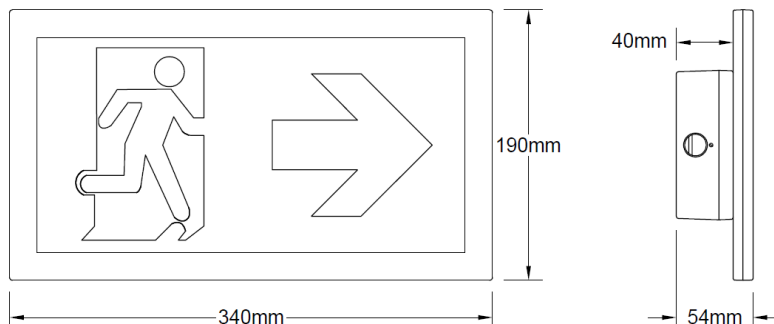

- Basic, DALI-2 or LiteMesh Wireless Operation
- Surface Mount (Wall)
- White Polycarbonate Body
- Additional Downward Facing Light
- Ingress Protection Rating - IP20 rated
- 30m Viewing Distance
- ISO7010 Legends as Standard
- DDP (Deep Discharge Protection)
- Samsung LED's
- Supplied With a Kit of Legends
- TM65.2 Rating of 21.46kg CO₂e
- Features Battery Temperature Protection

A stylish and compact wall mounting Single Sided LED Exit Sign that can either be surface or semi-recesses mounted.

The unit is available in either a Switchable Maintained/Non-Maintained, DALI-2 Self-Test, or a LiteMesh Ready wireless version. The unit comes with a PMMA legend which offers an impressive 30m viewing distance.

The luminaire is supplied with a pack of inlay panels which includes Arrow Down (AD), Arrow Left (AL), Arrow Right (AR) and Arrow up (AU).

The charger will cut-off if the Tc of the battery falls below 0 degrees C or above 55 degrees C. The product will however operate when required in emergency, should there be enough capacity remaining in the battery.

Order Codes

CE2S/M	Switchable Maintained
CE2S/DA	DALI-2 Type B, Switched Maintained Non-Dimmable, or Self-Test M3/NM3
CE2S/LMEM	LiteMesh Ready Wireless Maintained/Non-Maintained Self-Test

Technical Details:

CE2S/M

CE2S/DA

Mains Supply	230-240V AC 50/60 Hz	
Power Rating Charging - Maintained *	5.7W 31mA $\lambda = 0.75$	5W 28mA $\lambda = 0.74$
Power Rating Charged *	0.2W 8mA $\lambda = 0.11$	0.28W 8mA $\lambda = 0.14$
Duration	3-Hours	
Recharge Period	24-Hours	
Battery Size & Type	3.2V 3.8Ah LiFePO ₄ Cells	
Charge Current	225mA nominal	
Ingress Protection Rating	IP40	
Weight	1.2Kg	

* Following its initial charge, the unit will spend 90% of its operational life in standby mode

