


Technical Specification  
**MML/4W -**  
Emergency Conversion Range

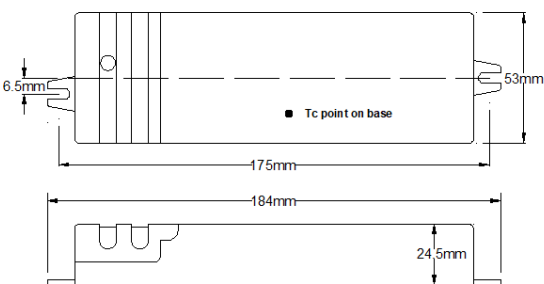

Fixing Centres 175mm

- Conversion Kit for Mains Voltage Lamps
- Deep discharge protection
- Split Pack Arrangement for Ceiling Voids
- Extra Long Life LiFePO<sub>4</sub> Batteries
- Converts Loads Up To 4W
- Passes Through 60mm Aperture
- Features Battery Temperature Protection

The MML Range is supplied as a split remote conversion kit for mounting away from the fitting. It is suitable for 230V DC

A split pack, 3 hour remote conversion kit for 230V DC loads. This pack will power the load at 100% (EOFi\*) for three hours in emergency.

The MML/4W/TP60 will power up to 4W of DC load.

\* EOfi= Emergency Output Factor/the percentage output in emergency

The charger will cut-off if the Tc of the battery falls below 0 degrees C or above 55 degrees C. The product will however operate when required in emergency, should there be enough capacity remaining in the battery.

Order Codes

MML/4W/TP60 Maintained Pack for 230V DC Loads up to 4W

CRL5 White, ceiling recess charge LED holder

NB: Please ensure that your lamp/luminaire is capable of being powered by DC voltage

Technical Details:

Input Voltage	230-240 Volts AC 50/60 Hz
Input Current (Charging)	3.7W 22mA $\lambda = 0.70$
Input Current (Standby)	1.5W 14mA $\lambda = 0.45$
Battery Type	6.4V 3.8Ah LiFePO <sub>4</sub>
Enclosure Dimensions	184mm L x 53mm W x 24.5mm H
Battery Dimensions	159mm L x 35mm $\Phi$
Overall Weight	0.45Kg
Ingress Protection	IP20