


Technical Specification

OLP/1

Emergency Bulkhead

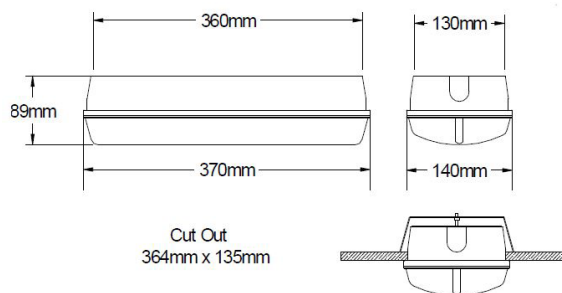

- IP65 Ingress Protection
- Standard and DALI Self-Test Options Available
- 1163 Lumen in Mains Operation
- 358 Lumen in Emergency Operation
- Makrolon Diffuser with High LOR
- Photometrically Tested by Lux TSI
- Extra Long Life LiFePO₄ Batteries
- Can Operate with LiteMesh Wireless System
- Can be supplied with Exit Legend
- Features Battery Temperature Protection

The OLP/1 is a high quality emergency LED bulkhead which is designed for interior and exterior applications.

The high output LED strip provides 1163 lumen in mains operation and 358 lumen in emergency operation after the diffuser.

The charger will cut-off if the Tc of the battery falls below 0 degrees C or above 55 degrees C. The product will however operate when required in emergency, providing there is enough capacity remaining in the battery.

Order Codes:

OLP/1/NM	Non-Maintained IP65 LED Bulkhead
OLP/1/M	Maintained IP65 LED Bulkhead
OLP/1/DA/NM	Non-Maintained DALI, IP65 LED Bulkhead
OLP/1/DA/MD	Maintained DALI, IP65 LED Bulkhead
OLP/1/LMEM/NM	Non-Maintained LiteMesh Ready Wireless Self-test, IP65 LED Bulkhead
OLP/1/LMEM/M	Maintained LiteMesh Ready Wireless Self-test, IP65 LED Bulkhead

Spacing Table:

Mounting	Axial to Wall		Axial to Axial		Transverse to Axial		Transv. to Transv.		Transverse to Wall	
Height	0.5 Lux	1.0 Lux	0.5 Lux	1.0 Lux	0.5 Lux	1.0 Lux	0.5 Lux	1.0 Lux	0.5 Lux	1.0 Lux
2.5m	2.9m	2.3m	9.7m	7.0m	10.9m	8.5m	13.2m	11.2m	5.6m	4.5m
3.0m	3.0m	2.5m	8.3m	6.0m	11.4m	9.1m	14.5m	12.2m	6.1m	4.6m
4.0m	3.4m	2.5m	8.4m	6.8m	12.6m	9.9m	16.7m	13.0m	6.5m	4.8m
5.0m	3.6m	2.4m	9.0m	7.1m	13.4m	10.3m	17.9m	13.4m	6.7m	4.3m
6.0m	3.6m	1.5m	9.8m	7.2m	14.2m	10.3m	18.6m	13.4m	6.7m	2.6m
8.0m	2.7m	-	10.1m	5.3m	14.7m	7.2m	19.2m	9.1m	4.5m	-

Technical Details:

Input Voltage	230-240 Volts 50/60Hz	Mains Output	1163 Lumen
Power Rating (Non-Maintained) * 1.4W 12mA $\lambda = 0.48$		Emergency Output	358 Lumen
Power Rating (Maintained)	12.4W 63mA $\lambda = 0.82$	Battery Temp. Parameters	0 °C to 55 °C
Emergency Duration	3-Hours	Battery Type	3.2V 3.8Ah LiFePO ₄
Light Source	V-S 23.5V 8.23W	Mains Cable Terminal	0.5mm x 2.5mm Cable
Beam Angle	125° x 117°	Ingress Protection	IP65
Light Source Colour Temperature 4000K		Dimensions	370mm x 140mm x 89mm
		Weight	2.1Kg

* After initial charge, the OLP/1 will spend 90% of its operational life in standby mode.

Tel +44 (0)1708 372223 | www.liteplan.com | customerservice@liteplan.com | RM3 OAP. UK

Liteplan reserve the right to change colour, price or specification without prior notice