


Technical Specification

JCB/75 -

Wall Mount 75m Viewing Exit Sign with Downlight Panel

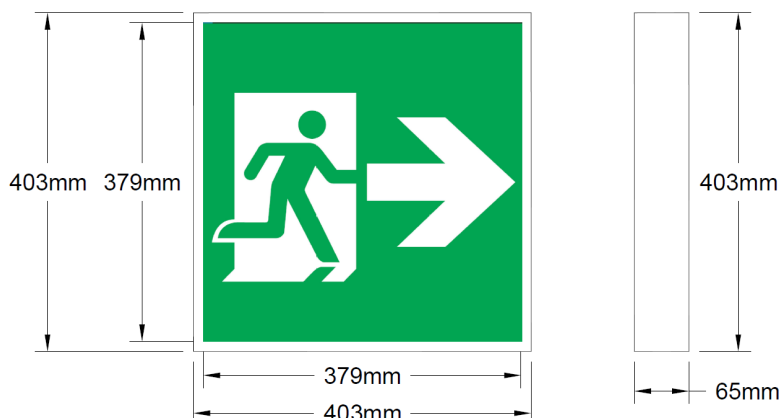

- Basic, or DALI-2 Operation
- Surface Mount (Wall)
- White Metal Body
- Additional Downward Facing Light
- Ingress Protection Rating - IP20 rated
- 75m Viewing Distance
- ISO7010 Legends as Standard
- DDP (Deep Discharge Protection)
- Vossloh Schwabe LED's
- Features Battery Temperature Protection

A wall mounting Single Sided LED Exit Sign that can be viewed from up to 75m.

The unit is available in either a Switchable Maintained/Non-Maintained or DALI-2 Self-Test version. The unit comes with a PMMA legend which offers an impressive 75m viewing distance. The luminaire is supplied with an ISO7010 legend panel. Arrow direction must be specified at time of ordering - Arrow Down (AD), Arrow Left (AL), Arrow Right (AR) and Arrow up (AU).

The charger will cut-off if the Tc of the battery falls below 0 degrees C or above 55 degrees C. The product will however operate when required in emergency, should there be enough capacity remaining in the battery.

Order Codes

JCB/75/NM/**	Non-Maintained Operation
JCB/75/M/**	Switchable Maintained Operation
JCB/75/DA/MD/**	DALI-2, DALI Maintained Non-Dimmable, or Self-Test M3/NM3

** Denotes arrow direction. e.g AD for arrow down.

Technical Details:

JCB/75/M

JCB/75/DA/MD

Mains Supply	230-240V AC 50/60 Hz	
Power Rating Charging - Maintained *	13.2W 68mA $\lambda = 0.81$	14.7W 72mA $\lambda = 0.84$
Power Rating Charged *	1.3W 13mA $\lambda = 0.43$	1.4W 12mA $\lambda = 0.48$
Duration	3-Hours	
Recharge Period	24-Hours	
Battery Size & Type	6.4V 3.8Ah LiFePO4 Cells	
Charge Current	225mA nominal	
Ingress Protection Rating	IP20	
Weight	1.2Kg	

* Following its initial charge, the unit will spend 90% of its operational life in standby mode

Tel +44 (0)1708 372223 | www.liteplan.com | customerservice@liteplan.com | RM3 OAP. UK

Liteplan reserve the right to change colour, price or specification without prior notice

ISS 140725



LiFePO₄

