


BATTERY CONNECTIONS

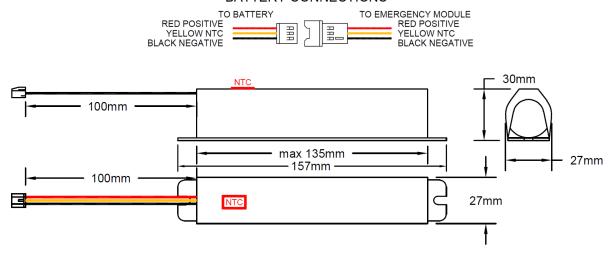

Technical Details:

Nominal Voltage (V)	6.4 Volts
Nominal Capacity	3.8Ah
Rated Wh	24.32Wh
Battery Type	2IFpR27/67
3 Hour Rated Current	950mA
Charging Cut-off/Restore V	7.1V/6.9V
Cell Format	2S1P
Battery Temperature Sensor	NTC

Dimensions:

Length x Width x Height	157mm x 27mm x 30mm
Fixing Centres	M4 x 147mm
Weight	193g

Temperature:

Standard Temperature Range	5 to + 55°C
Storage (within 1 Year)	0 to + 25°C



We advise that when shipping these batteries, regulation UN3480 (Bulk Packed Batteries) or UN3481 (Batteries packed with its associated control gear) is followed, and the relative label will appear on the outer packaging.

Order Code

2/LP38/S/TE 6.4V 3.8Ah Sleeved with Mounting Plate and TE Connector

This battery features a protection circuit module (PCM) that regulates the current between cells and protects the battery from any potential short circuit situations. The battery also features temperature monitoring via the yellow cable and built in NTC thermal sensor.



Batteries are supplied with leads and an irreversible socket with 100cm of cable. **ENSURE CORRECT POLARITY**

Tel +44 (0)1708 372223 | www.liteplan.com | customerservice@liteplan.com |

Liteplan reserve the right to change colour, price or specification without prior notice



