


BATTERY CONNECTIONS

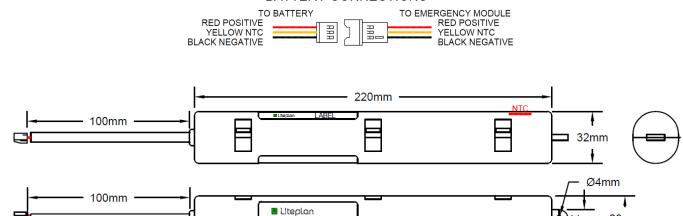

LABEL

Technical Details:

| Nominal Voltage (V) | 3.2 Volts |
|----------------------------|--------------|
| Nominal Capacity | 4.8Ah |
| Rated Wh | 15.36Wh |
| Battery Type | 1IFpR19/66-3 |
| 3 Hour Rated Current | 1200mA |
| Charging Cut-off/Restore V | 3.65V/3.45V |
| Cell Format | 1S3P |
| Battery Temperature Sensor | NTC |

Dimensions:

| Length x Width x Height | 220mm x 32mm x 32mm |
|-------------------------|---------------------|
| Fixing Centres | M4 Hook Eye |
| Weight | 193g |

NTC

Temperature:

| Standard Temperature Range | 5 to + 55°C |
|----------------------------|-------------|
| Storage (within 1 Year) | 0 to + 25°C |

We advise that when shipping these

|♦)11mm 28mm

batteries, regulation UN3480 (Bulk Packed Batteries) or UN3481 (Batteries packed with its associated control gear) is followed, and the relative label will appear on the outer packaging.

Order Code

3/LP48/PT/TE 3.2V 4.8Ah Encased Battery with TE Connector

This battery features a protection circuit module (PCM) that regulates the current between cells and protects the battery from any potential short circuit situations. The battery also features temperature monitoring via the yellow cable and built in NTC thermal sensor.



Batteries are supplied with leads and an irreversible socket with 100cm of cable. **ENSURE CORRECT POLARITY**

Tel +44 (0)1708 372223 www.liteplan.com | customerservice@liteplan.com |

Liteplan reserve the right to change colour, price or specification without prior notice



