


BATTERY CONNECTIONS



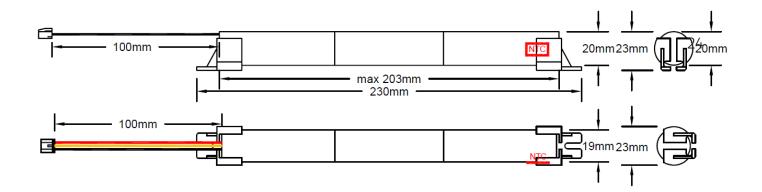

Technical Details:

Nominal Voltage (V)	3.2 Volts
Nominal Capacity	4.8Ah
Rated Wh	15.36Wh
Battery Type	1IFpR19/66-3
3 Hour Rated Current	1200mA
Charging Cut-off/Restore V	3.65V/3.45V
Cell Format	1S3P
Battery Temperature Sensor	NTC

Dimensions:

With End Caps LxWxH	230mm x 23mm x 23mm
Without End Caps LxWxH	203mm x 19mm
End Cap Fixing Centres	M4 x 215-220mm
Weight	138g

Temperature:

Standard Temperature Range	5 to + 55°C
Storage (within 1 Year)	0 to + 25°C

We advise that when shipping these batteries, regulation UN3480 (Bulk Packed Batteries) or UN3481

(Batteries packed with its associated control gear) is followed, and the relative label will appear on the

outer packaging.

Order Code

3/LP48/S/TE 3.2V 4.8Ah Sleeved with End Caps and TE Connector

This battery features a protection circuit module (PCM) that regulates the current between cells and protects the battery from any potential short circuit situations. The battery also features temperature monitoring via the yellow cable and built in NTC thermal sensor.



Batteries supplied with leads are fitted with an irreversible socket & 100cm of cable. **ENSURE CORRECT POLARITY**

Tel +44 (0)1708 372223 www.liteplan.com | customerservice@liteplan.com |

Liteplan reserve the right to change colour, price or specification without prior notice



