


Technical Specification

CE1S/CPH -

Centrally Supplied Surface Mount Exit Sign

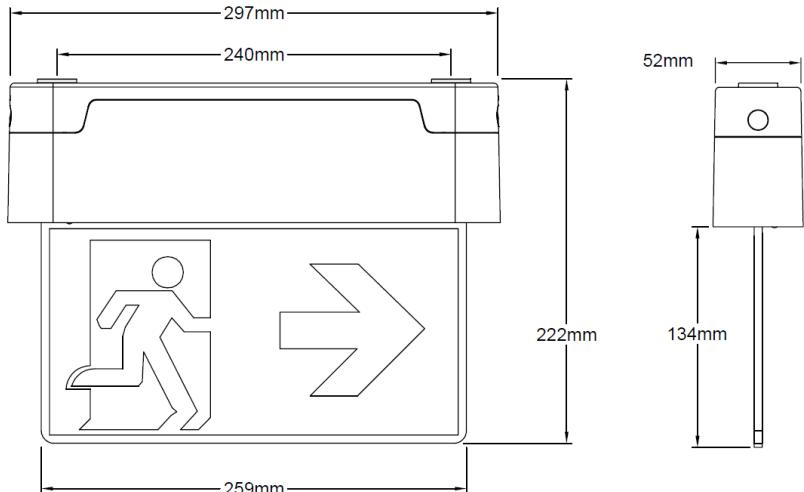

- Surface Mount (Wall or Ceiling)
- White Polycarbonate Body
- Ingress Protection Rating - IP20
- 25m viewing distance
- ISO7010 legends as standard
- Samsung LED's
- TM65.2 Rating of 14.98kg CO²e
- With Hold off Relay

A stylish and compact Double Sided LED Exit Sign suitable for either wall or ceiling mounting. The unit is suitable for use with 50V, 110V, or 240V AC/DC central battery systems.

The fitting is supplied with a PMMA screen printed legend plate which offers an impressive 25m viewing distance. The legend panels are available in either Arrow Up (AU), Arrow Down (AD) or Arrow Left/Right (ALAR). Please note that up and down legends are single sided, and the arrow left/right is double sided.

Order Codes

CE1S/CPH/**

Centrally Supplied Surface Mount Exit Sign with Hold off Relay

** Please specify legend required AU, AD, or ALAR

Technical Details:

Mains Supply	230-240V AC 50/60 Hz
Power Consumption (240V AC)	3.6W, 36mA, $\lambda = 0.41$, VA 8.8
Power Consumption (240V DC)	3.36W, 14mA
Power Consumption (110V AC)	3.6W, 54mA, $\lambda = 0.58$, VA 6.1
Power Consumption (110V DC)	3.3W, 30mA
Power Consumption (50V AC)	4.4W, 135mA, $\lambda = 0.65$, VA 6.9
Power Consumption (50V DC)	3.9W, 78mA
Ingress Protection Rating	IP40
Weight	0.65Kg