


Technical Specification
CE2S/CPH -
Centrally Supplied Wall Mount
Exit Sign with Downlight Panel

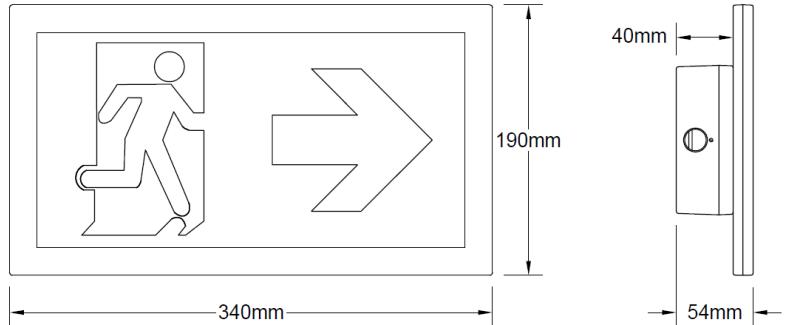

- Surface Mount (Wall)
- White Polycarbonate Body
- Additional Downward Facing Light
- Ingress Protection Rating - IP20 rated
- 30m Viewing Distance
- ISO7010 Legends as Standard
- DDP (Deep Discharge Protection)
- Samsung LED's
- Supplied With a Kit of Legends
- TM65.2 Rating of 21.46kg CO²e
- With Hold off Relay

A stylish and compact wall mounting Single Sided LED Exit Sign that can either be surface or semi-recesses mounted. The unit is suitable for use with 50V, 110V, or 240V AC/DC central battery systems.

The unit comes with a PMMA legend which offers an impressive 30m viewing distance.

The luminaire is supplied with a pack of inlay panels which includes Arrow Down (AD), Arrow Left (AL), Arrow Right (AR) and Arrow up (AU).

Order Codes

CE2S/CPH

Centrally Supplied Wall Mounted Exit Sign with Hold off Relay

Technical Details:

Mains Supply	230-240V AC 50/60 Hz
Power Consumption (240V AC)	3.6W, 36mA, $\lambda = 0.41$, VA 8.8
Power Consumption (240V DC)	3.36W, 14mA
Power Consumption (110V AC)	3.6W, 54mA, $\lambda = 0.58$, VA 6.1
Power Consumption (110V DC)	3.3W, 30mA
Power Consumption (50V AC)	4.4W, 135mA, $\lambda = 0.65$, VA 6.9
Power Consumption (50V DC)	3.9W, 78mA
Ingress Protection Rating	IP40
Weight	0.85Kg