


Technical Specification

S/ADM/1/44/OA -

DALI-2 Self-Test Standalone LED

With Dimming Halo Charge Indicator

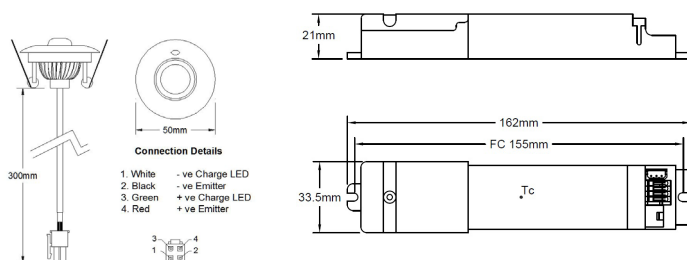

- Suitable for Ceiling Recess Applications
- Can Operate with LiteMesh Wireless System
- Plugs and Sockets for Simple Installation
- Strain Relief Module
- Can be Supplied without LED Where Required
- Suitable for 40-43mm Apertures
- DALI-2 Certified Device
- TM65 Rating - 6.87 CO₂e
- 135° Beam Angle
- With Dimming Halo Charge Indicator

The S/ADM/1/44/OA DALI-2 Self-Test range is supplied with an open area specific LED emitter and is designed for ceiling recess applications. The maintained/non-maintained emergency driver is supplied with strain relief cables and passes through a 40mm to 43mm aperture.

A 3 hour DALI-2 Certified Self-Test Emergency Lighting driver that operates at 700mA in both emergency and in switchable mains operation. This unit primarily is designed as your DALI-2 emergency lighting driver, but can also be used for night lighting purposes via a timer switch, where required. The batteries used with this unit not only offer double the life of traditional emergency lighting batteries, but consume far less power during their operation.

The module, batteries and LED all feature plugs and sockets for simple installation.

The charger will cut-off if the T_c of the battery falls below 0 degrees C or above 55 degrees C. The product will however operate when required in emergency, should there be enough capacity remaining in the battery.

Order Codes

S/ADM/1/44/OA/W Complete 268 Lumen Emergency Solution with Open Area Lens IP54 LED - White Bezel
With Dimming Halo Charge Indicator

Technical Details:

Mains Supply	230-240V AC 50/60 Hz	Maximum Module Ta and Tc	Ta = 50 °C & Tc = 70 °C
Power (Standby) *	0.26W 8mA λ = 0.14	Battery Temp. Parameters	0°C to 55 °C
Power (Charging) *	1.7W 14mA λ = 0.5	Battery Discharge Current	900mA nominal
Recharge Period	24-Hours	Discharge Voltage Cut Off	2.5 Volts
Battery Size & Type	3.2V 3.8Ah LiFePO ₄	Bus Current Consumption	1.46mA
Charge Current	225mA Nominal	Battery Type	IFpR27/67
Module Fixing Centres	155mm x M4	Mains Input	0.5mm ² - 1.5 mm ²
Overall Weight (with LED)	0.41Kg	Module Dimensions (LxWxH)	162mm x 33.5mm x 21mm
Void Depth (40mm cut out)	85mm	Battery Dimensions (LxØ)	100mm x 35mm

* After its initial charge, the S/ADM/1 will spend 90% of its operational life in standby mode

Tel +44 (0)1708 372223 | www.liteplan.com | customerservice@liteplan.com | RM3 OAP. UK

Liteplan reserve the right to change colour, price or specification without prior notice