


Technical Specification  
**S/BNM/1/44 -**  
 Non-Maintained Emergency LED  
 With Dimming Halo Charge Indicator

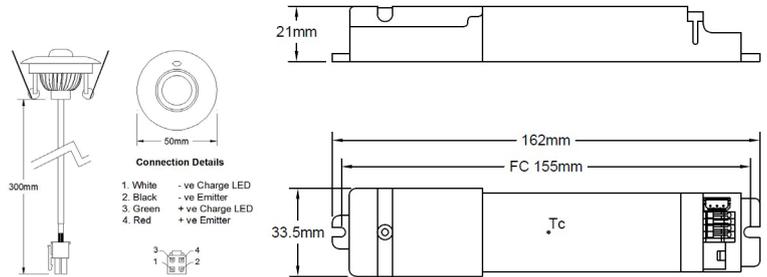

- Suitable for Ceiling Recess Applications
- Deep Discharge Protection
- Plugs and Leads for Simple Installation
- Strain Relief Module
- Can be Supplied without LED Where Required
- Suitable for 40mm to 43mm Apertures
- TM65 Rating - 6.73 CO<sub>2</sub>e
- Features Battery Temperature Protection
- 135° Beam Angle

The S-BNM/1/44 range is supplied with an open area specific LED emitter and is designed for ceiling recess applications. The non-maintained emergency driver is supplied with strain relief cables and passes through a 40mm to 43mm aperture. A 3-hour emergency lighting driver that operates at 700mA in emergency only. This range operates with lithium iron phosphate (LiFePO<sub>4</sub>) batteries which not only consume far less power under operation, but last far longer than traditional emergency lighting batteries. The module, batteries and LED all feature plugs and leads for simple installation. The minimum void depth with a 40mm cut-out is 90mm. The charger will cut-off if the Tc of the battery falls below 0°C or above 55°C. The product will however operate when required in emergency, providing there is sufficient capacity remaining in the battery.

**Order Code**

<b>S/BNM/1/LED/44/W</b>	Complete 266 Lumen Emergency Solution with Open Area Lens LED - White Bezel With Dimming Halo Charge Indicator
-------------------------	--

**Technical Details:**

Mains Supply	230-240V AC 50/60 Hz	Max Module Ta and Tc	Ta: 50 °C & Tc: 70 °C
Power Rating - Charging	1.7W 14mA λ = 0.5	Battery Tc Parameters	0 °C to 55 °C
- Charged	0.2W 8mA λ = 0.11	Duration	3 Hours
Battery Discharge Current	900mA Nom.	Recharge Period	24-Hours
Discharge Voltage Cut Off	2.5Volts	Battery Size	3.2V 3.8Ah LiFePO <sub>4</sub>
Ingress Protection	IP20	Battery Type	High Temp - IFpR27/67
Charge Current	225mA Nominal	Mains Input Terminals	0.5mm - 1.5mm
Protection Class	II	Overall Weight (with LED)	0.34Kg
Module Dimensions (LxWxH)	150mm x 30mm x 28mm	Overall Weight (with LED)	0.34Kg
Minimum Void Depth	90mm	Module Fixing Centres	145mm
		Battery Dimensions (LxØ)	90mm x 35mm