
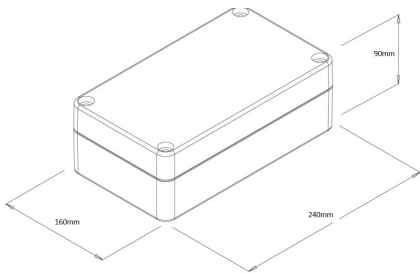


Technical Specification
D2N/1/FDR/WP200/R -
Remote DALI-2 Self-Test Range

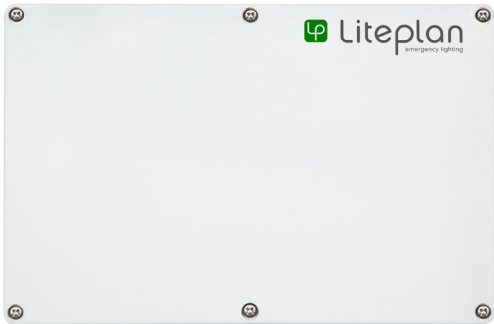

L = 240mm W = 160mm H = 90mm

- DALI-2 Self-Test Conversion Kit
- Average Emergency Power - 2.1W
- Complete Kit Housed in One Enclosure
- Extra Long Life LiFePO4 Batteries
- Converts LED Loads from 6-80 Volts
- Ingress Protection Rating of IP54
- Moulded in High Grade Polycarbonate
- Suitable for 200mm Aperture
- Free issued Mains Driver Fitted
- Features Battery Temperature Protection

There is 1 version available -

Order Codes

The D2N/1/FDR/WP200/R is supplied as a remote conversion kit for mounting away from the fitting in damp or wet locations. This kit would be used in applications where space inside the fitting is limited.

A 3 hour DALI-2 self-test emergency lighting conversion kit which operates with extra long life LiFePO4 batteries. The unit is designed to accommodate many mains drivers, which must be free issued. The D2N/1/FDR/WP200/R automatically adjusts the output LED current to provide the best match between the battery and the load, providing maximum illumination whilst ensuring full battery duration.

Please note that if mounting this kit more than 1m away from the luminaire, Fire Rated cable must be used to connect the pack to the fitting. (BS EN 5266-1)

The charger will cut-off if the Tc of the battery falls below 0 degrees C or above 55 degrees C. The product will however operate when required in emergency, should there be enough capacity remaining in the battery.

D2N/1/FDR/WP200/R	For LED loads, operating in voltage range of 6 - 55 Volts
-------------------	---

Unit supplied in single part remote enclosure with cables for simple connection. Free issued mains driver is fitted to the enclosure providing a maintained operation.

Technical Details:

Mains Supply	230-240V AC 50/60 Hz	Max Ta and Tc	Ta = 50 °C & Tc = 70 °C
Power Rating (EM only - Charging)	2.8W 17mA λ = 0.70	Battery Temp. Parameters	0°C to 55 °C
Power Rating (EM only - Standby)	1.4W 12mA λ = 0.48	Mains Input Gland Size	16mm
Duration	3-Hours	Battery Discharge Current	900mA Nominal
Recharge Period	24-Hours	Discharge Voltage Limit (DDP)	3 Volts
Battery Size & Type	3.2V 3.8Ah LiFePO4	Ingress Protection	IP54 (IP65 with Gasket)
Charge Current	225mA Nominal	Mains Input Terminal - Screw	1.0mm ² - 2.5 mm ²
Enclosure Material	Polycarbonate	Dimensions (LxWxH)	240mm x 160mm x 90mm
Kit Weight	1.28Kg		