
Technical Specification
S/CPH/LED -
Centrally Supplied Recessed LED



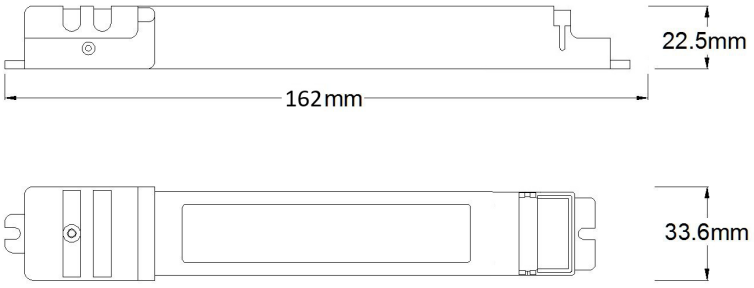

Fixing Centres 155mm

- Complete Centrally Supplied Emergency LED
- Suitable for 50V, 110V & 240V Systems
- Runs the dedicated LED at 700mA
- Operates from AC or DC Systems
- Suitable for Ceiling Recess Applications.
- Plugs and Leads for Simple Installation
- Strain Relief Module
- Can be Supplied Without LED Where Required

The S/CPH range is supplied as a complete ceiling recess emergency pack to power one of a range of dedicated emergency LEDs from a central battery or static inverter system.

The S-CPH unit is designed as a centrally supplied luminaire (240V, 110V or 50V AC/DC) with a dedicated LED, with the output held off whenever the 240V AC unswitched supply is present.

At the point the unswitched supply is broken, the driver will accept the feed from the central battery and drive the emergency LED at 700mA. The delivered lumen outputs can be found below.

There are 4 versions available -

Order Codes

** - W = White (RAL9016) - B = Black (RAL9005)

S/CPH/LED/43/OA/**	Complete 268 Lumen Emergency Solution with Open Area Lens LED
S/CPH/LED/43/CO/**	Complete 266 Lumen Emergency Solution with Corridor Lens LED
S/CPH/LED/43/FL/**	Complete 237 Lumen Emergency Solution with Flood Optic LED
S/CPH/LED/45/**	Complete 308 Lumen Emergency Solution with Multiple Optics

Technical Details:

Emergency Voltage from CBU	45-240V AC/DC (50V, 110V & 230V Nominal)
Emergency Power from CBU	See Installation Instruction
Mains Un-Switched Supply	230-240V AC 50/60Hz
240V Hold off Current/Power	6mA, 1W, λ = 0.65
Control Gear Enclosure Dimensions	197mm long x 40.6mm diameter
Overall Weight	0.42Kg
Input Cable Sizes	0.5mm to 1.5mm
Connection to LED	Via C201 Plug and Socket

Tel +44 (0)1708 372223 | www.liteplan.com | customerservice@liteplan.com | RM3 0AP. UK

Liteplan reserve the right to change colour, price or specification without prior notice

ISS 291026