
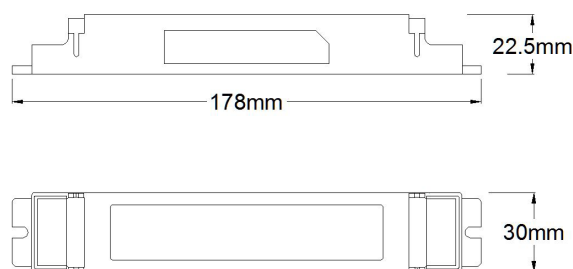


Technical Specification

CBP - Changeover Relay Range



Fixing Centres 172mm

- Static Inverter Changeover Module
- Suitable for 50V, 110V or 240V DC Systems
- Suitable for 240V AC Systems
- Holds Power from the Primary of the Driver
- Inhibits the Dimming State of the Load
- Available in Remote Format if Required

The CBP is supplied either as a changeover module, which can be integrally mounted within the luminaire, or as a strain relief version for remote mounting.

Emergency lighting change over relays with an additional dimming inhibition relay that will restore a fitting that was running in a mains dimmed state, to full brightness for emergency operation.

Compatible with fluorescent and LED loads and runs in conjunction with either 240V 50/60Hz AC static inverter or 50V, 110V or 240V DC central battery systems.

NB: The associated control gear must be capable of operating from the emergency voltage.

Order Codes

CBP/M	Supplied as a changeover module for integral mounting within a luminaire
CBP/NEON/G	Although not essential, a 240V AC/DC neon is available for fitting indication
CBP/TP40	The above module with end caps and cables with Strain Relief

Technical Details:

Emergency Voltage from Static Inverter	240V AC (50/60Hz)
Emergency Voltage from Central Battery	50V, 110V or 240V DC
Tc Temperature and Point	70°C Top Centre
Ambient Temperature	0°C - 35°C
Mains Supply	230-240V AC 50/60Hz
Changeover Relay Rating	3A 240V
Power Rating	2.0W 14mA $\lambda = 0.58$
Dimensions L x W x H	178mm x 30mm x 22.5mm (f/c 172mm)
Remote Version Dimensions (if required)	231mm x 33.6mm x 22.5mm
Module Weight	0.11Kg